



# A “Squeeze and Heat” Approach to Water Reclamation

Al Garcia  
Bryan Lanterman  
Matt Hollander

DRS Sustainment Systems Inc.  
St Louis, MO 63121

Environment, Energy Security & Sustainability Symposium New Orleans, LA May 21-24, 2012

Copyright © 2012 DRS Technologies, Inc. All rights reserved.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>MAY 2012</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-2012 to 00-00-2012</b>	
4. TITLE AND SUBTITLE <b>A 'Squeeze and Heat' Approach to Water Reclamation</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>DRS Sustainment Systems Inc, 201 Evans Lane, St. Louis, MO, 63121</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>Presented at the NDIA Environment, Energy Security &amp; Sustainability (E2S2) Symposium &amp; Exhibition held 21-24 May 2012 in New Orleans, LA.</b>					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>28</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

# Acknowledgement / Disclaimer

## **Acknowledgment**

This material is based upon work supported by the U.S. Army Contracting Command, Aberdeen Proving Ground (Soldier, Chemical, Research and Test), Natick Contracting Division, 1 Kansas Street, Natick, MA under Contract No. W911QY-11-C-0001.


## **Disclaimer**

Any opinions, findings and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the U.S. Army Contracting Command, Aberdeen Proving Ground (Soldier, Chemical, Research and Test), Natick Contracting Division.



# Presentation Agenda

- **OBJECTIVE**
- **SCOPE OF WORK**
- **RESULTS**
- **LESSONS LEARNED**
- **CONCLUSION**

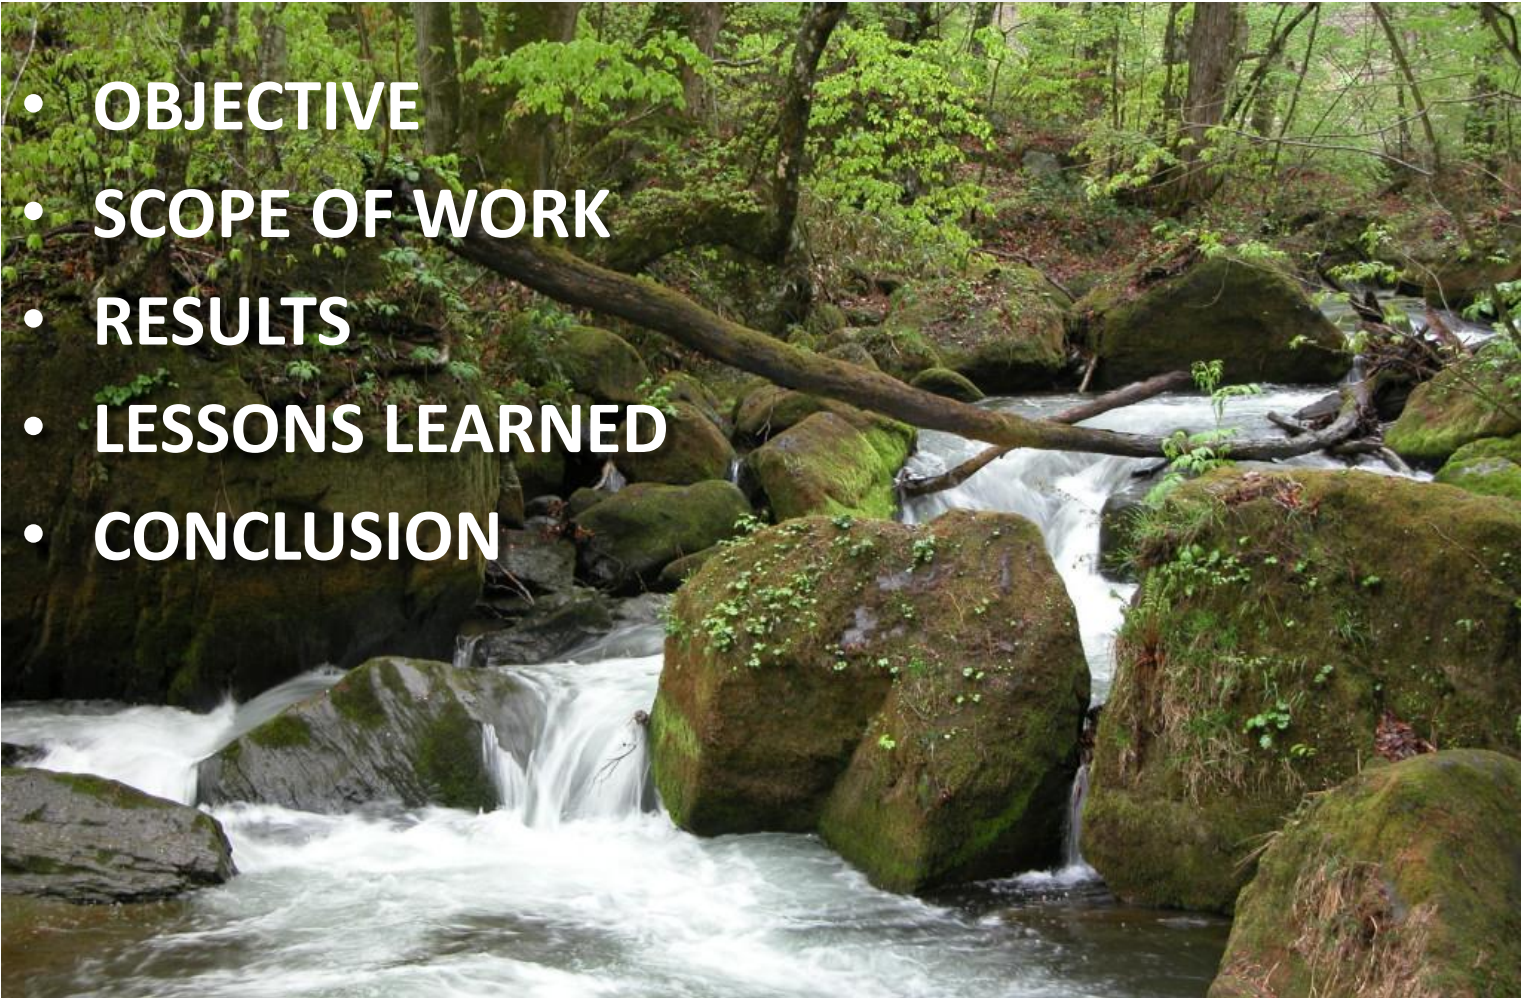


# The Water Cycle



**LOCATE**

**STEP 1**

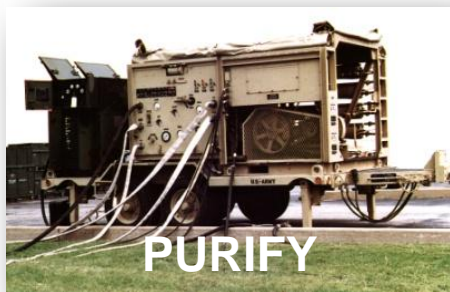

**PURIFY**

**STEP 2**



**DELIVER**

**STEP 3**



**CONSUME**

**STEP 4**



**DISPOSE**



**STEP 5**





# Objective of the Effort

- Develop a system for producing reusable water from blackwater.
- Complement existing shower water reclamation system.
- Use the *change* in the *properties* of water that takes place when water is at high pressure and high temperature...
  - to precipitate inorganic material, and
  - to oxidize organic material.

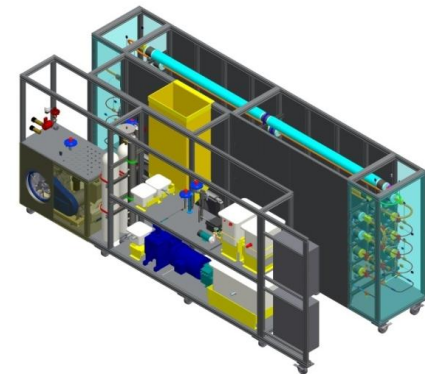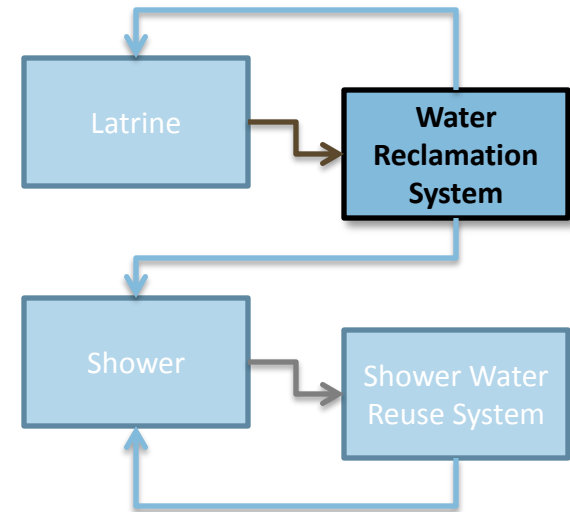

Water Reclamation System



# SCOPE OF WORK



# Scope of Work

- Identify the end-user operational requirements.
- Research current and prior art in supercritical water oxidation.
- Perform tradeoff studies to select a process flow suitable for implementation.
- Select equipment for the chosen process flow.
- Build and test a process demonstration prototype.



# Reusable Water Requirement

- Water quality criteria defined by the Department of the Army, Office of the Surgeon General.

Parameter	Max. Level or Range	Unit
<b>Physical Properties</b>		
Color	50	TCU
Odor	3	TON
pH	5 - 9	pH
Total dissolved solids (TDS)	2000	mg/L
Turbidity	1	NTU
<b>Microbiological</b>		
BOD5	10	mg/L
Coliform	0	CFU/100 mL




- Based on TB MED 577, Sanitary Control and Surveillance of Field Water Supplies, Dec 2005.



# Technical Literature Search

- Sources consulted on supercritical water oxidation and blackwater chemistry...
  - Chemical Engineering Research and Design
  - The Journal of Supercritical Fluids
  - Chemical Engineering Journal
  - High Pressure Research
  - Waste Management & Research
  - Industrial & Engineering Chemical Research
  - Journal of Hazardous Materials
  - Water Science and Technology
  - American Institute of Chemical Engineers Journal
  - Society of Automotive Engineers
  - United States Patent and Trademark Office

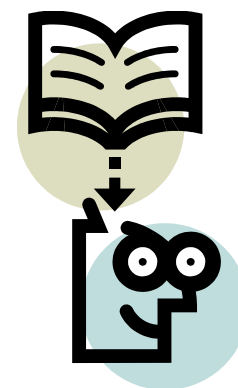

# Tradeoff Studies

- Tradeoff analyses were conducted in regard to...
  - Process flowsheet selection (TOPSIS)
  - Process control hardware selection (MUA)
  - Pressure controller hardware selection (Pugh Matrix)
  - Reactor kinetic models
  - Process equipment design

**PUGH EVALUATION MATRIX**

		EWRS Pressure Controller									
Category	Evaluation Criteria	Alternative Concept									
		1	2	3	4	5	6	7	8	9	10
Signal	Input signal	0	0	0	0	0					
	Output signal	0	0	0	0	0					
Power	Supply voltage	-1	0	0	0	0					
Control	Mode	0	0	0	0	0					
	Sample rate	+1	+1	+1	+1	+1					
Temperature	Operating	0	+1	-1	+1	-1					
	Storage	0	+1	0	+1	0					
Communications	RS-485	0	+1	0	+1	0					
	Protocol	0	0	0	0	0					
Risk											
Σ+		1	4	1	4	1	0	0	0	0	0
Σ-		1	0	1	0	1	0	0	0	0	0
ΣS		7	5	7	5	7	0	0	0	0	0

Pugh Matrix for Pressure Controller


## Acronyms:

- TOPSIS – Technique for Order Preference by Similarity to Ideal Solution
- MUA – Multi-attribute Utility Analysis




# Design Tools


- System design tools used...
  - Chemical process simulation, CHEMCAD.
  - Heat transfer studies conducted using empirical correlations from literature search.
  - Insulation sizing, 3E Plus.
  - Mechanical component design and human factors analysis, Creo Elements/Pro (formerly Pro/Engineer).
  - Systems engineering, DOORS and MagicDraw.

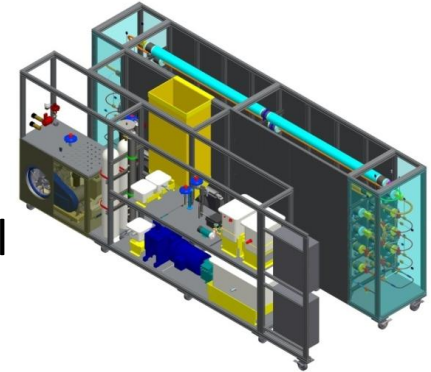


3D System Modeling

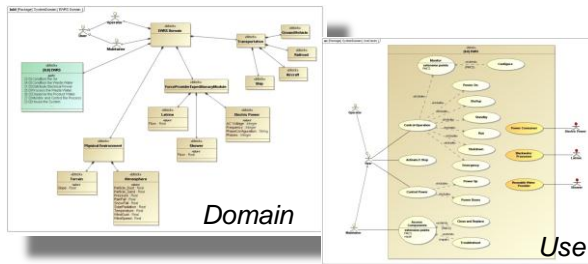

Functional Analysis and Design



Human Factors Verification

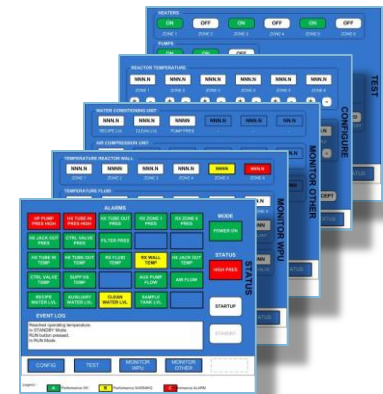




HMI Design





# Results Summary


- The design of a 15 gph water reclamation unit has been completed.
- A recipe for artificial blackwater has been defined for use during test and evaluation.
- A design of experiments (DOE) has been established.
- The measures of process effectiveness have been identified.

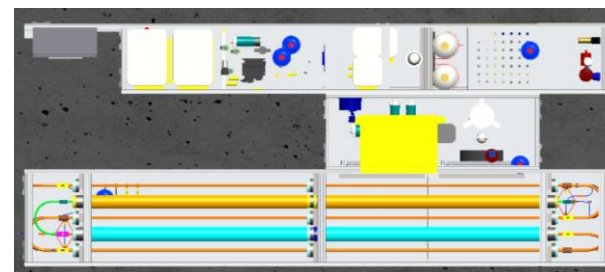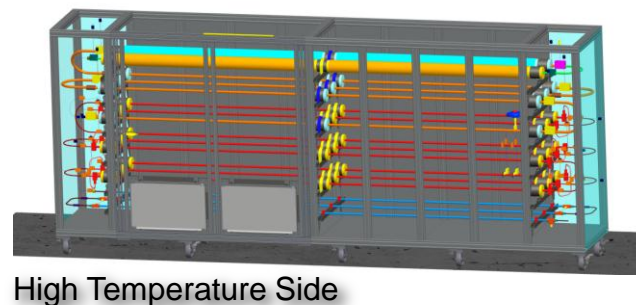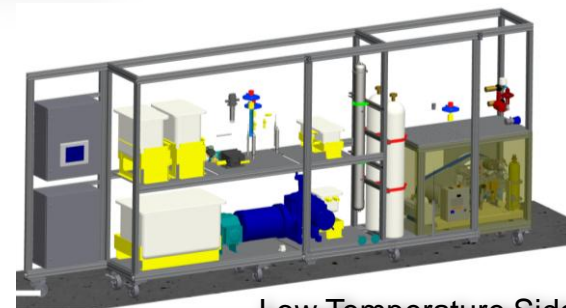

Top View

# Results - System Design


- Based on past design experience and recent technical literature.
- Comprises...
  - Power distribution,
  - Process control,
  - Water and air feed control,
  - Heat exchangers and reactor, and
  - Product water management.
- Fits in a 1C ISO container.

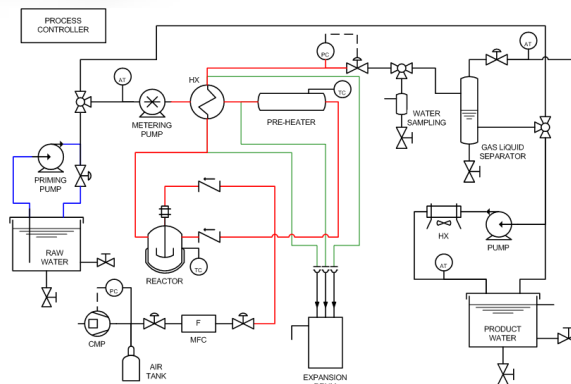

Process Flow



Prior Design (2009)

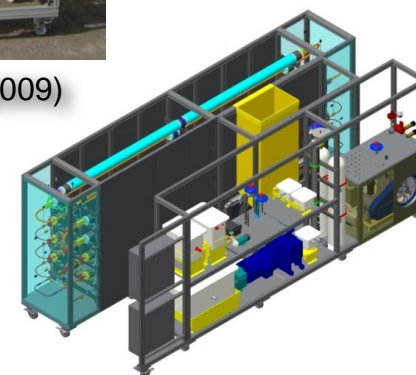

Present Day Design (2012)




## Results - Chemical Process

- Material balance performed for artificial wastewater
- Energy balance used
  - CHEMCAD chemical process simulator for fluid thermal demand
  - 3E Plus Insulation thickness calculation for thermal losses
- Reactor design based on flow rate, input concentration, conversion, and kinetics
- Heat exchanger design for thermal recovery involved pinch point analysis
- Reaction may be self sustaining for high input solids concentrations

# Results - Artificial Wastewater

- Chemically and organically similar to blackwater.
- It is a controlled variable during process evaluation.

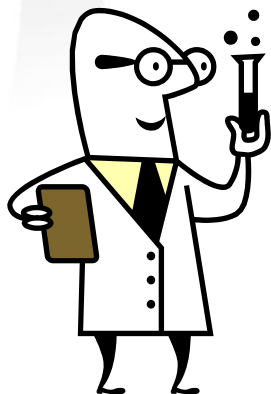

## Recipe Ingredients

Peptone  
Meat Extract  
Vegetable Extract  
Urea  
Cellulose powder  
 $K_2HPO_4$   
NaCl  
 $CaCl_2 \cdot 2H_2O$   
 $MgSO_4 \cdot 7H_2O$



Totals/Overall	BW Range	Recipe	Units
Overall Heating Value	13,900 - 16,100	14,028	kJ/kg
Organic Heating Value	-	14,978	kJ/kg
P as $P_2O_5$	2.3 - 4.3	2.4	%
K as $K_2O$	1.8 - 3.0	3.0	%
Fiber	20 - 35	29	% dry weight
Urea	11.7 - 23.1	8.8	% solids
Nitrogen	8.8 - 11.4	9.3	% solids

# Results - Design of Experiments

- A ½-fraction experiment with 5 factors, 2 levels, 3 trials.
- The control factors (inputs) are...
  - Process temperature,
  - Process pressure,
  - Stoichiometric air ratio,
  - Wastewater flow rate, and
  - Feedwater solids concentration.
- The response measurements (outputs) are...
  - Turbidity
  - pH
  - Total Dissolved Solids
  - Total Suspended Solids
  - Biological Oxygen Demand





# Results - Design Metrics


- Two sets of metrics used for evaluating the system design
- Measures of Effectiveness
  - A water production rate of 15 gph.
  - The reusable water quality criteria defined by the U.S. Army.
- Measures of Performance
  - Volume/footprint: 1C ISO Container
  - Weight: 10,000 lbs
  - Electrical Power: 30 kW





## Lessons - From End-User Perspective


- Many potential field applications exist, both military and civilian.
- Force Provider Expeditionary (FPE) base camp selected for system and process evaluation.
- FPE has a need, but no solutions exist at this time.
- System reduces the water footprint.
- System reduces warfighter casualties.
- System increases base security.
- System reduces environmental harm.

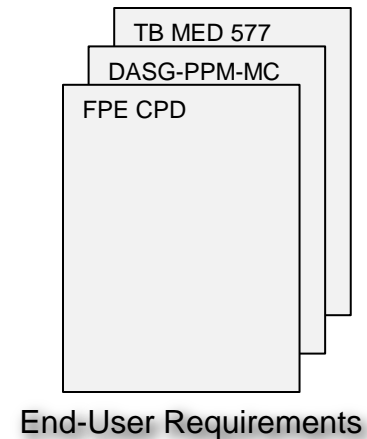



## Lessons - From Design Perspective


- The technical literature contains a wide range of empirical design criteria.
- The system design is based on conservative analysis.
- Some experimentation will be required, e.g. to quantify solids precipitation.
- Opportunities for reduced footprint and cost are anticipated.

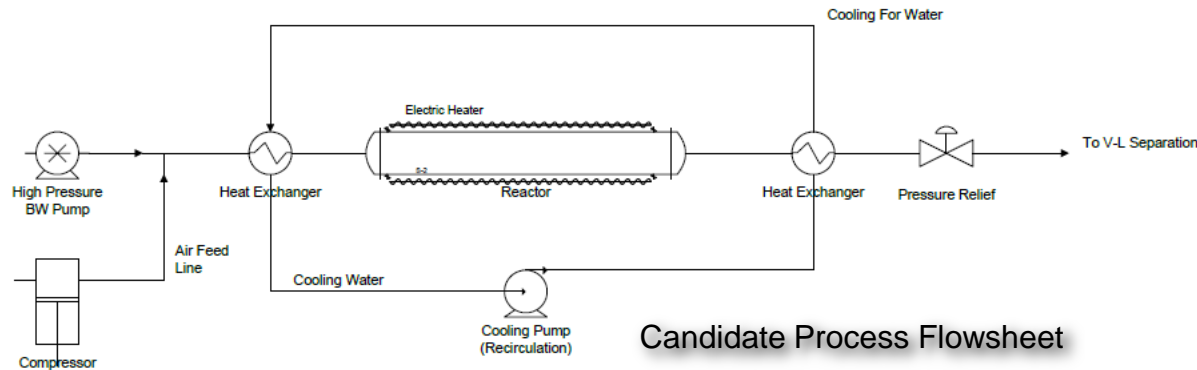


Candidate Process Flowsheet

## Lessons - From Equipment Perspective

- Specialty metals are required, e.g. Hastelloy, Inconel, etc.
- Manufacturers qualified to design and build small-size pressure vessels are limited.
- Some large-size pressure vessel vendors are willing to go small-scale.

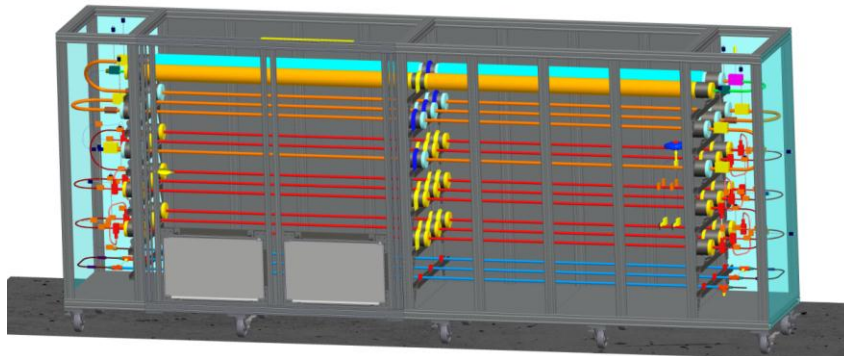


High Pressure and High Temperature Section



Side View

## Lessons - From Process Evaluation Perspective

- There is no standard for evaluating wastewater treatment processes, especially energy and material balance.
- Had to develop an artificial wastewater recipe to emulate the chemical and organic composition of blackwater.
- There is only one set of criteria for reusable water, the one defined by the Department of the Army, Office of the Surgeon General.

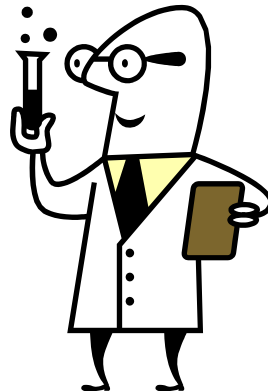






# Conclusion

- The development of a water reclamation system has been presented.
- The effort is a joint industry-government endeavor.
- The resulting design offers great promise as a deployable, sustainable, in-situ, water reclamation system.
- A prototype is being built to quantify the process effectiveness and efficiency.

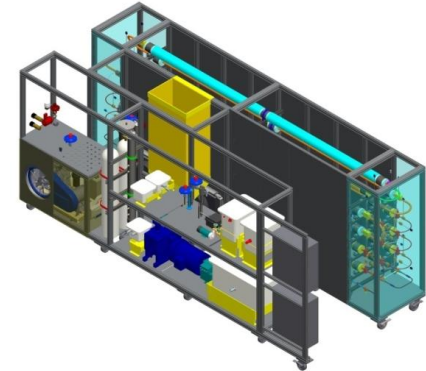

Blackwater Reclamation System

# Future Work

- Evaluate alternative thermal energy sources, e.g. fuel fired heaters.
- Evaluate supplementary thermal energy conversion methods, e.g. Sterling engines.
- Evaluate alternative front-end processing methods to produce a higher solids concentration feed.
- Scale-up the design to higher flow rates, e.g. 50 gph.
- Ruggedize equipment for field test and evaluation.





---

# *Thank you!*

---